




BMS - Remote / Manual Switching



- Fully sealed, heavy duty, double pole.
- Designed for commercial, marine and industrial applications, specifically those carrying flammable loads.
- Anti-crack outer case material.
- Highly resistant to impact, fuel oils, petroleum etc.
- Self extinguishing during fire.
- Manual and remote switching capabilities.
- LED display indicates switched position.
- Environmentally sealed – IP66.
- 2-year warranty.

Contacts : Silver Alloy
Current Rating : 200A @ 5 Min
Current Rating – Intermittent : 500A
Handle : Zinc Alloy
Body : Thermoset Polyester
Weight : 3.8kg
Approvals : AS3947.3.2001, C-Tick
Ingress Protection : IP66

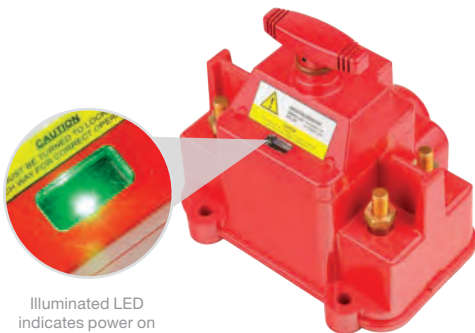

Delayed Switching – Manual vs Electrical

A unique feature of the Big Red battery isolator is delayed switching of the auxiliary contacts. The delay is different when being electrically switched vs manually switched.

Electrically Switched:
Approximately 2-3 milliseconds prior to the main contacts opening.

Manually Switched:
100-150 millisecond prior to the main contacts opening.

For full details on the iROS Rollover Switch see page 14.



Big Red

Part No.	Voltage	Description
SSB100	24	Battery Isolator for use with AS2809.2 compliant rollover switch
SSB102	12	Battery Isolator for use with AS2809.2 compliant rollover switch

For full details of the iROS Rollover Switch see page 14.