


Miscellanies

Vandal Resistant



- Vandal resistant momentary or latching switches.
- Black anodised stainless steel models available.
- Laser etching available for anodised models.
- LED illumination.
- Highly impact resistant.
- Variety of illumination colours available
- Environmentally sealed – IP65 (face only).



Current Rating : 2A
High Current 20A
Contacts : Silver Alloy
Body : Stainless Steel
Ingress Protection : IP65 (face only)
Approvals : CE, RoHS

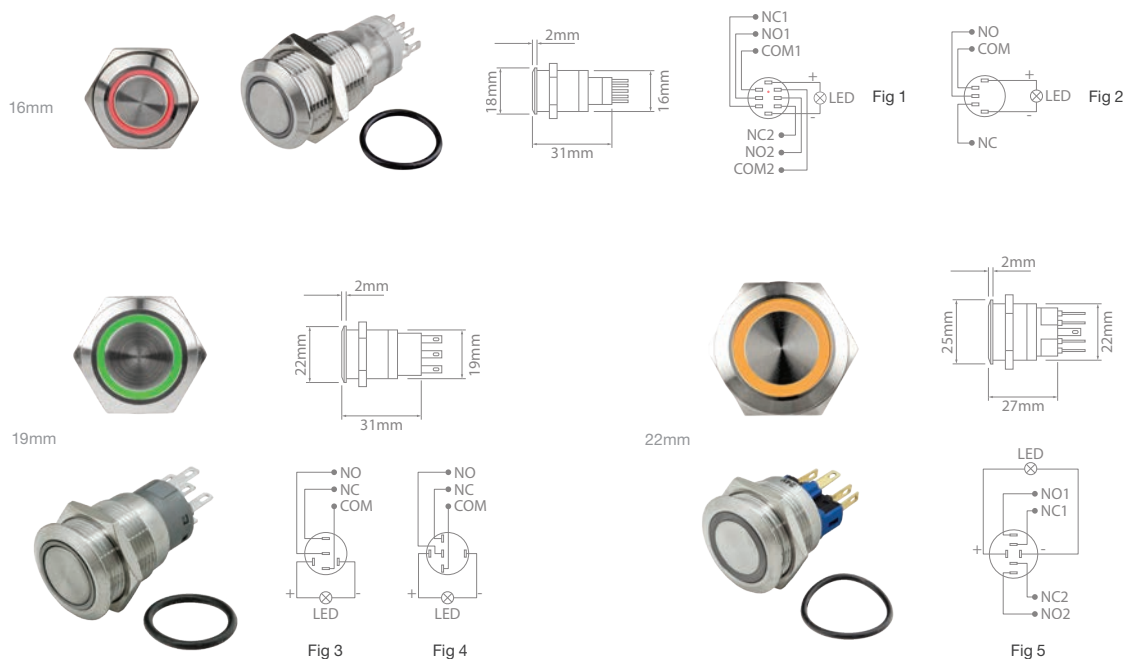

Vandal Resistant Switches

Size (mm)	Voltage	Max. Panel Thickness (mm)	Function	Contact Type	Fig	Red	Green	Amber	Blue
16	12-24	10	Momentary	N/O & N/C*	1	L16-RR-DC	—	—	—
16	12-24	10	Momentary	N/O & N/C	2	L16-RR	L16-RG	L16-RA	L16-RB
19	12-24	10	Momentary	N/O & N/C	3	L19-RR	L19-RG	L19-RA	L19-RB
19	12-24	10	Momentary	N/O & N/C	4	L19TF-RR	—	—	L19TF-RB
19	12-24	10	Latching	N/O & N/C	4	—	—	—	L19TF-RB-L
22	12-24	8	Momentary	N/O & N/C*	5	L22-RR	—	L22-RA	L22-RB

*Double Pole.

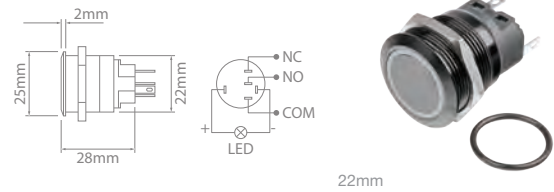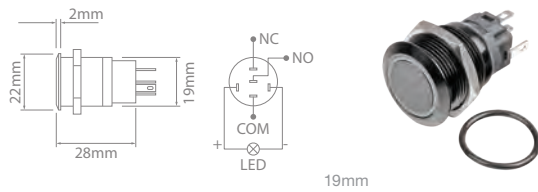

Laser Etching for Anodised Switches




For further information ask your local reseller or enquire online at ionnic.com



Vandal Resistant Switches – Anodised NEW

Size (mm)	Voltage	Max. Panel Thickness (mm)	Contact Type	Blue Illumination	
				Momentary	Latching
19	12–24	10	N/O & N/C	L19TAF-RB	L19TAF-RB-L
22	12–24	10	N/O & N/C	L22TAF-RB	L22TAF-RB-L

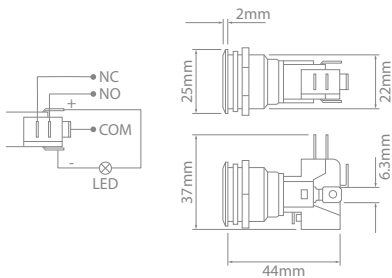

Vandal Resistant Switches – High Current

Size (mm)	Max. Panel Thickness (mm)	Function	Contact Type	Red Illumination	
				12V	24V
22	13	Latching	N/O & N/C	L22HD-RL12V	L22HD-RL24V
22	13	Momentary	N/O & N/C	L22HD-RM12V	L22HD-RM24V



Vandal Resistant Switches – Accessory

Part No.	Description	Suits
L16-PLUG	Push on plug with 15cm fly lead	16mm