S9 PRO SERIES

ROADVISION



FEATURES

- S9 Stealth PRO Series 9” Driving Light
- Dynamic start-up DRL
- Includes Black cover with DRL windows
- Blackout mounting hardware
- 3W Osram LED’s produce super white light close to daylight
- Multi-volt 10-30V DC input & low current draw
- 50,000 hour LED lifespan with solid state technology
- Thermal Management Technology
- Light weight tough die-cast aluminium housing & polycarbonate lens
- IP68 & IP69K protection
- Simple 2 wire installation
- Over/under voltage, reverse polarity protection
- EMI/EMC radio interference approved


THERMAL MANAGEMENT TECHNOLOGY | HALO DRL RING | MULTI-VOLT 10-30 VDC | POLYCARB LENS | COLOUR TEMP | IP PROTECTION | OVER/UNDER VOLTAGE PROTECTION | REVERSE POLARITY PROTECTION | DEUTSCH CONNECTOR | OSRAM LEDS | RADIO INTERFERENCE APPROVED | 7 YEAR WARRANTY

Roadvision’s S9 Stealth PRO Series Driving Lights deliver cutting-edge upgrades and a sleek modern appearance, making them the perfect choice for larger 4WD’s and Trucks. Maintaining the contemporary bezel-less design, the S9 series now features dynamic start-up Daytime Running Lights (DRL) and a stylish black cover with a dedicated DRL window, offering enhanced functionality and aesthetics. When not illuminated, the DRL seamlessly darkens, ensuring a sleek, understated look. With black mounting hardware, the S9 series utilizes 34 x 3W Osram LEDs to produce an impressive 10485lm per light and 912mts of beam penetration at 1 lux. Built to withstand the harshest conditions, these lights feature a lightweight yet tough aluminium housing and a durable polycarbonate lens. Powered by Roadvision’s Thermal Management Technology, the S9 Stealth PRO Series guarantees superior performance and durability in any environment.

PART NUMBERS




RDL6901SD
9” LED Driving Light 10-30V Round 143W Spot Beam

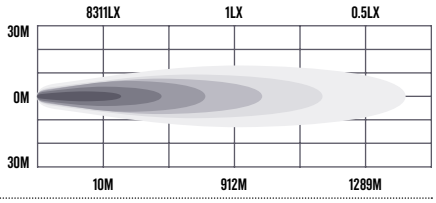

SPECIFICATIONS	RDL6901SD
BEAM PATTERN	Spot
MAXIMUM LUMENS PER LIGHT (PAIR)	10,485lm (20,970lm)
MAXIMUM LUX @ 10M PER LIGHT (PAIR)	8,311lx (16,622lx)
MAXIMUM BEAM DISTANCE @ 1LX PER LIGHT (PAIR)	912m (1,289m)
INPUT VOLTAGE	10-30VDC
MAXIMUM WATTS	143W
NUMBER OF LEDS	34 x 3W Osram
CURRENT DRAW @ 13.8V	10.34 Amps
LENS CONSTRUCTION	Polycarbonate
HOUSING CONSTRUCTION	Die-Cast Aluminium
WIRING DRIVING LIGHTS	2 Pin Deutsch Plug, Red - Driving Light +Ve, Black - Driving Light -Ve
WIRING DRL HALO	Green Wire +Ve
DIMENSIONS AXBXC	238 x 87 x 249mm

LINE DIAGRAM

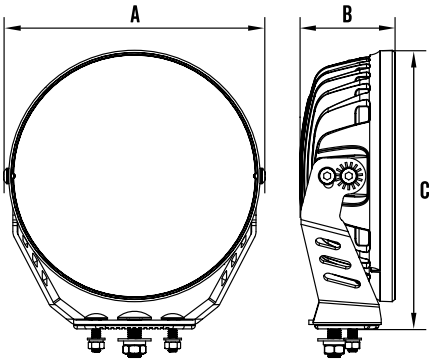

LED DRIVING LAMPS

© Copyright Specialist Wholesalers Pty Ltd 2025. All information is found to be correct at time of printing