

Marine Battery Master Switch DPST On/Off

M290-05BX

This Marine Battery Master Switch will disconnect the battery preventing drain.

Features


- Silver laminated contacts
- Brass case, chrome lever
- Field term 20A continuous
- 2 stud terminals 10-32
- Mounting stem 3/4"-24 thread
- Mounting stem length 46mm
- Suits panel thickness up to 23mm
- UL rating 707B

Specifications

- Voltage 6V-36V Multivoltage
- Amperage 800A Intermittent, 125A Continuous, Small: 20A Cont
- Dimensions H 86 x Ø 67
- Configuration DPST
- Modes On/Off
- Application Heavy Duty, Marine

Part Numbers

- M290-05BX Boxed

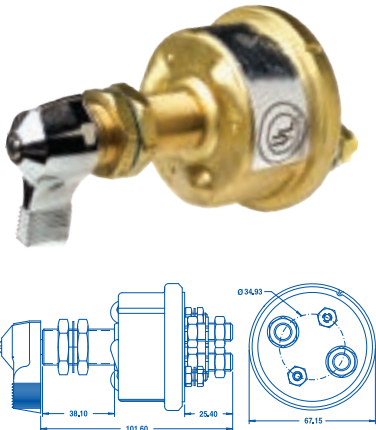

CAT OEM Battery Master SPST On/Off with Key

24024BX

CAT OEM Battery Master Switch replaces 7N0718

Features

- Two prong key type
- Silver laminated contacts, chrome lever
- Weather resistant O-ring sealed
- Indexing pin aligns switch and prevents rotation
- 2 stud terminals 10-32
- Mounting stem 3/4"-24 thread, L 13.5mm
- Suits panel thickness 6.5mm to 19mm

Specifications

- Voltage 6V-36V Multivoltage
- Amperage 1000A Intermittent, 125A Continuous
- Dimensions H 86 x Ø 67
- Configuration SPST
- Modes On/Off
- Application Heavy Duty, Mining

Part Numbers

- 24024BX Boxed

